

# DEADLATCH



## TL4510

### LATCH BOLT

- 5/8" x 1" x 1/2" throw
- Field reversible
- Anti-friction Delrin insert for quiet operation
- Auxiliary latch deadlocks latch bolt to prevent forced entry

### BACKSET

- 1 1/8" or 31/32" available
- Case is zinc plated for corrosion resistance
- Complete with machine screws for mounting in aluminum stile doors

### OPERATION

- Latchbolt is retracted by operation of key in cylinder, optional paddles, handles, or thumb turn from inside.
- Latch Hold Back feature engaged by holding bolt fully depressed while turning the key in reverse to secure bolt.

### FACEPLATES

- 628 (Silver) or 313 (Dark Bronze)


FLL-FLAT	DEADLATCH FACEPLATE FLAT
FLL-LH	DEADLATCH FACEPLATE BEVELLED LH
FLL-RH	DEADLATCH FACEPLATE BEVELLED RH
FLL-RAD	DEADLATCH FACEPLATE RADIUS
FLL-RADWLH	RADIUS WITH PILE ON LEFT SIDE (STD)

### STRIKES

- Supplied standard with small stainless steel strike plate only
- Optional small strike #SC-4510, or large strike #SC-4520, complete with mounting plate and dust box, see page DL4.

 **THOMAS**  
Architectural Hardware  
[www.kmthomas.com](http://www.kmthomas.com)

## DIMENSIONS

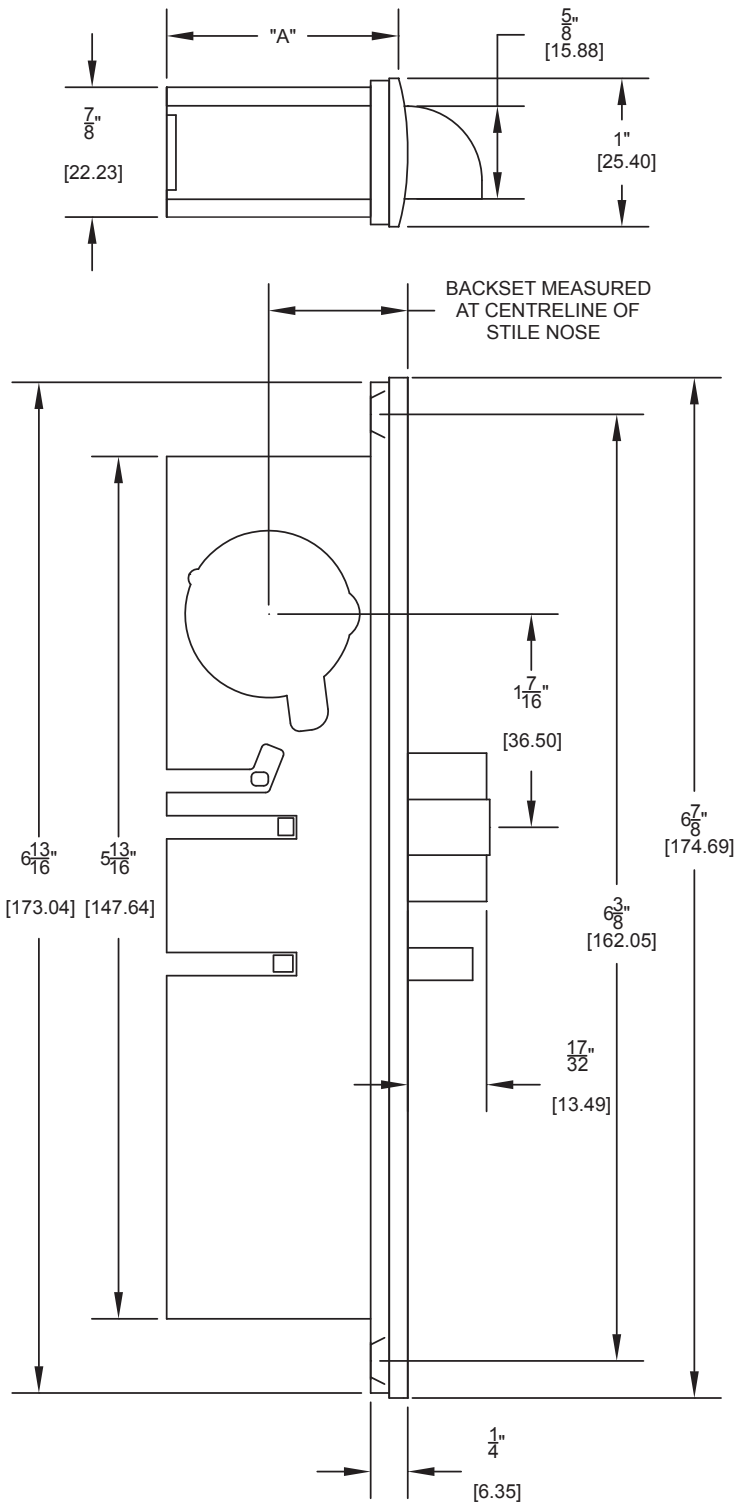

BACKSET	"A"
$\frac{31}{32}$ " [24.6]	1.60" [40.6]
$1\frac{1}{8}$ " [28.6]	1.76" [44.7]